



MUNCIE POWER PRODUCTS

Product Bulletin #00126


Subject: A20 Series Valve Body Updates

Date: September 11, 2024

URL: www.munciepower.com

Effective on A20 Series units built August 27, 2024 and later.

A change is being made to the valve body on the A20 Series power take-off. The new valve body has a -5 ORB port for activation, but will retain the -4 ORB port for the pressure switch. This change is being implemented to prevent plumbing errors, as the -5 elbow will not thread into the -4 switch port, and vice versa. Images of the old and new covers are shown below. Model codes will not be changing. There are no changes to the hose kits.

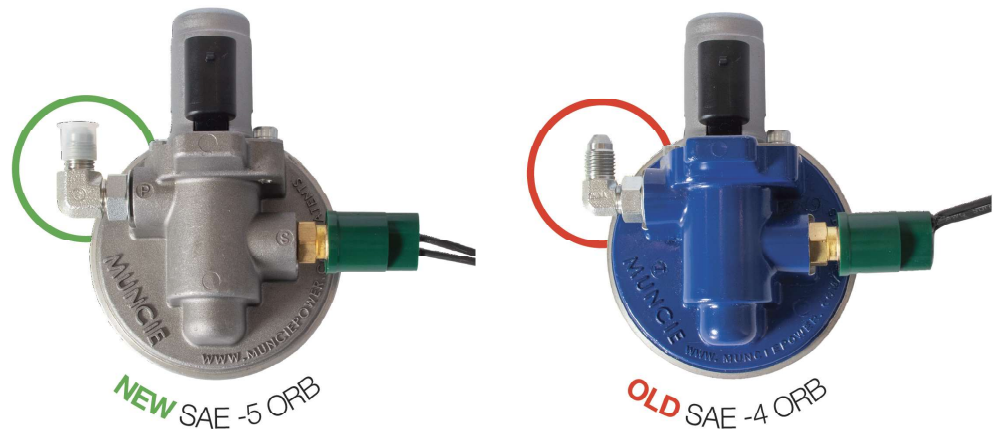

The new part numbers are as follows:

15T67209 - Standard valve body (shift types HX, H2, JX, J2, XX, RX)

15T67210 - Muncie Start® valve body (shift types SX, S2, RS)

43T64636 - SAE -5 ORB elbow fitting

New valve bodies are backwards compatible with both A20 Series and MC1 Series units, but will require the -5 ORB elbow fitting.

For more information, contact the Muncie Power Customer Service team at munciepower.com/contact.

WE BUILD
TRUST.