


DO NOT SCALE  
WORK TO DIMENSIONS  
REPORT ERRORS

This Print Contains Information Which is The Property Of MUNCIE POWER PRODUCTS  
And is Furnished Only For Service, Instruction Or Parts Identification. It is Not  
To Be Used For Manufacturing Or Procurement Purposes From Other Than Proprieter.

| Secondary 12 Pos. Plug |            |            |
|------------------------|------------|------------|
| Pin                    | Function   | Wire Color |
| A1                     | Power      | Red        |
| A2                     | Power      | Red        |
| A3                     | Power      | Red        |
| A4                     | CAN LI     | White      |
| A5                     | CAN HI     | Green      |
| A6                     | Ground     | Black      |
| A7                     | Power      | Red        |
| A8                     | CAN HI     | Green      |
| A9                     | CAN LI     | White      |
| A.10                   | Address #1 | Plug       |
| A.11                   | Address #2 | Plug       |
| A.12                   | -          | Plug       |

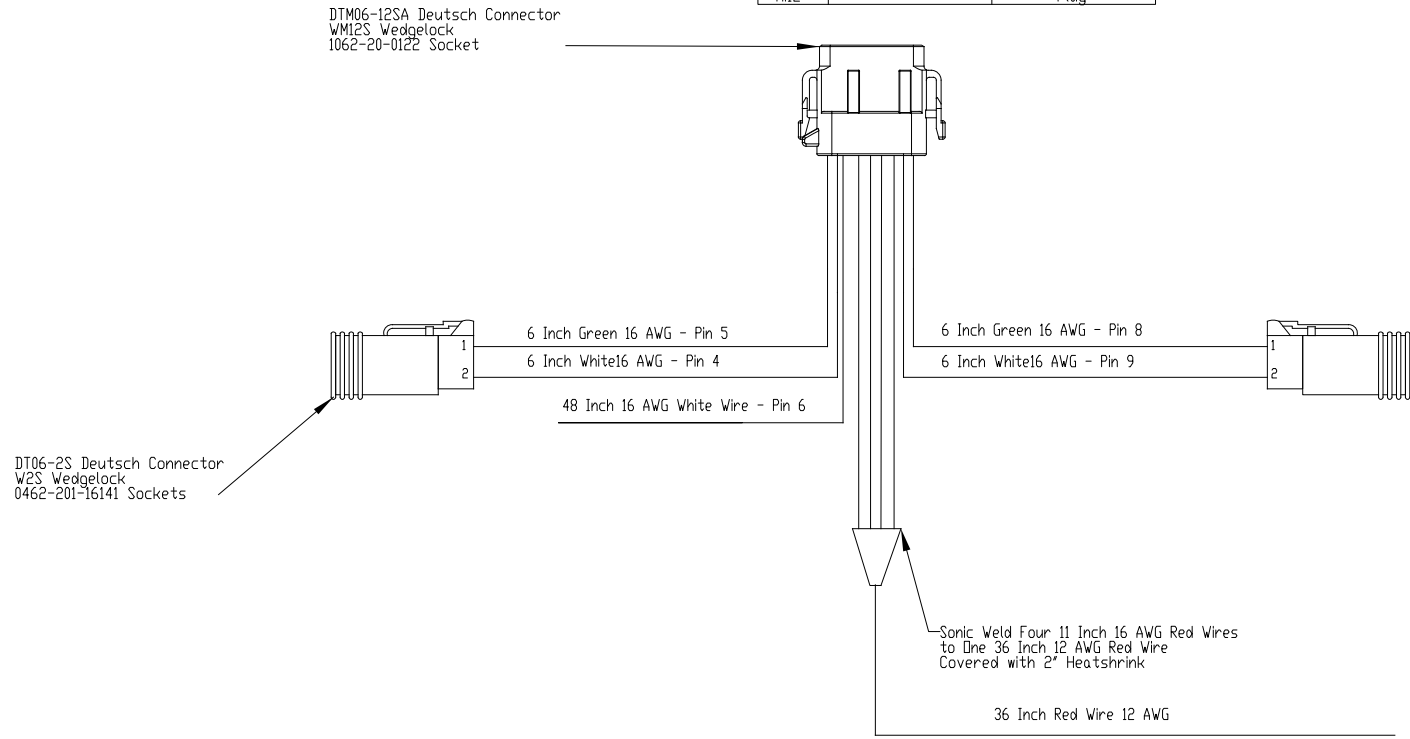


DT06-2S Deutsch Connector  
W2S Wedgelock  
0462-201-16141 Sockets

DTM06-12SA Deutsch Connector  
WM12S Wedgelock  
1062-20-0122 Socket

Sonic Weld Four 11 Inch 16 AWG Red Wires  
to One 36 Inch 12 AWG Red Wire  
Covered with 2" Heatshrink

Note: All Wires GXL unless otherwise specified

|  |                |   |               |
|--|----------------|---|---------------|
|  Muncie Power Products, Inc.<br>Muncie, IN U.S.A. |                | CASTING NO.                                     | REV.          |
|  |                | TITLE Advantage Plus<br>Secondary Power Harness |               |
| DRAWN BY: NSZ  | DATE: 07/26/18 | CASTING MATERIAL                                |               |
| CHK. BY: BS  | DATE: 7/26/18  | APPD. BY: KW                                    | DATE: 7/26/18 |
| UNLESS OTHERWISE SPECIFIED   |                | WEIGHT SCALE NA                                 |               |
| SURFACE FINISH 125/  |                | HEAT TREATMENT                                  |               |
| 2 PLACE DECIMALS ± 0.030   |                | MATERIAL  |               |
| 3 PLACE DECIMALS ± 0.010   |                | DRAWING NUMBER: B APWH61CAL                     |               |
| EXCEPT DRILLED HOLES   |                | REV. 00   |               |
| BREAK SHARP CORNERS  |                | SIMILAR TO                                      |               |
| ALL FILLETS AND RADII 0.12 R.  |                |   |               |