


## Networking Valve Manifolds

1. Pressure In - Tee the outlet of the pump to the "P" ports on the primary, scraper, and tow plow valve assemblies
2. Tank - Route the T ports from the scraper and tow plow manifolds back to the T port on the primary. This will ensure the oil is routed to the return filter.
3. Load Sense:
  - Tee load sense ports together from valves and plumb to LS pump control module on pump



### Auger Reverse Plumbing

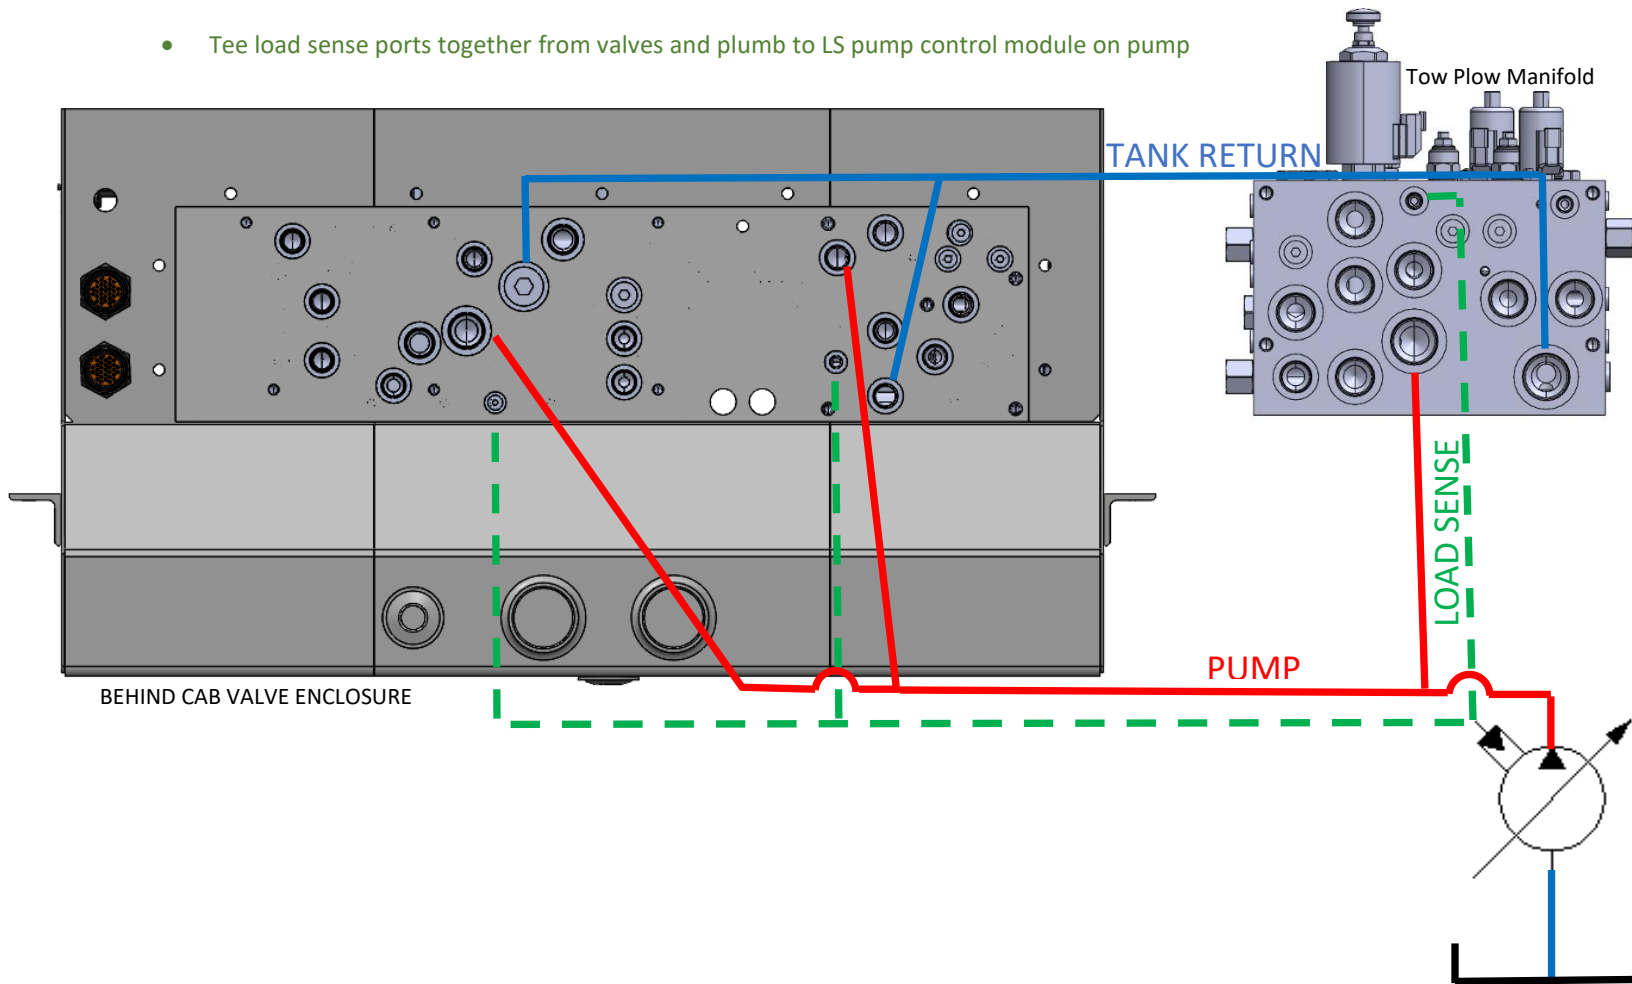