

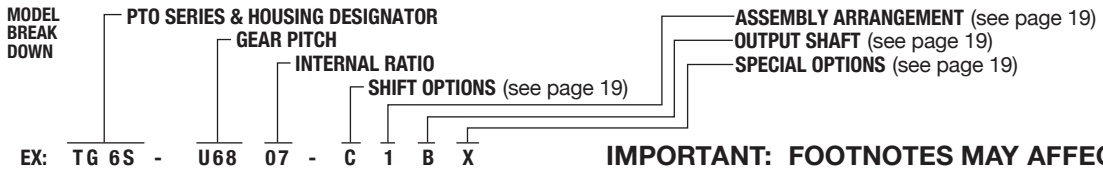


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

DETROIT DIESEL TRANSMISSION								REAR SIDE ONLY (BOTTOM OPENING TURN PAGE)				
		DT12-DC, DT12-DHE, DT12-DV Footnotes (1, 2, & 3) REQUIRES PTO PREP – CODE See Footnote (2)						METRIC OPENING				
								PTO DRIVE GEAR DATA:				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	RS6S-P89M1-P1PX	1,2,3	CRNK	71			601K6950000			Elec/Air	317	60
	RS6S-P89M2-P1PX	1,2,3	CRNK	97			601K6950000			Elec/Air	317	60
	RS6S-P89M3-P1PX	1,2,3	CRNK	134			601K6950000			Elec/Air	295	57
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION		No Adapter Available						REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- PTO output shaft speed show with transmission in LO Range. For HI Range multiply speed shown by 1.27.
- PTO prep package required! Components for PTO activation are supplied with chassis, and do not come with PTO. Order code 362-822 (Driveline applications) or 362-825 (Hydraulic pump application) from Dealer at time of vehicle order. PTO shown with SAE-BB hydraulic drive output. 1410 companion flange change code to "D" output option.
- Direct mount pumps or direct mount components are limited to 29.5 lb.ft. bending moment at PTO pad. Contact Muncie Power should you need assistance calculating this value. Direct mount hydraulic pumps require metric hardware to mount pump. Pump support brackets are not permitted on rear PTO as per the transmission manufacturer!

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

	DT12-OC, DT12-OHE, DT12-OV	BOTTOM OPENING ONLY (REAR OPENING TURN PAGE)	
		METRIC OPENING PTO DRIVE GEAR DATA: N/A LOCATION: PLMF: PLV: RPM:	

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO BOTTOM MOUNT PTOS AVAILABLE – USE REAR OPENING											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION
No Adapter Available
REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES: